

NMF-4IS-**xxx**S2L-YL -2/4/8/12/16/24

NIKOMAX

9/125


OS2,

(A)-LSLTx,

NMF-4IS-**xxx**S2L-YL

ISO/IEC 11801 OS2 ITU-T G.652.D.

(A)-LSLTx.

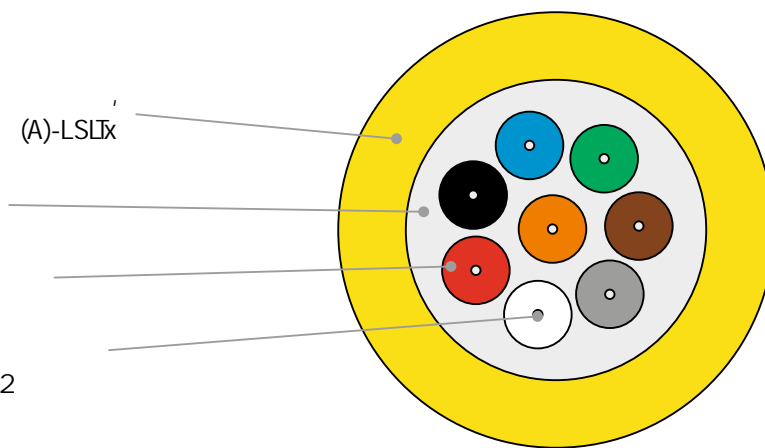

SM 9/125 OS2

NMF-4IS-008S2L-YL

8

9/125,

OS2 & G. 652 D,

()-LSLTx,

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Purple	Pink	Cyan	Dark Blue	Dark Orange	Dark Green	Dark Brown	Dark Grey	Dark White	Dark Red	Dark Black	Dark Yellow	Dark Purple	Dark Pink	Dark Cyan

NIKOMAX NMF-4IS-008S2L-YL 8x SINGLE MODE 9/125 ISO/IEC 11801 OS2 & ITU-T G.652.D Hr(A)-LSLTx **YYYYYxxxM**
YYYYY- , **xxx** -

2000 .

NMF-4IS-xxxS2L-YL						
	2	4	8	12	16	24
	9/125 (Single Mode)					
	ISO/IEC 11801 OS2 & ITU-T G.652.D					
	900 ± 25					
	(A)-LSLTx					
	4,0 ± 0,2	4,9 ± 0,2	5,5 ± 0,2	6,2 ± 0,2	7,3 ± 0,2	8,5 ± 0,2
	10 Ø					
	440			660		
	100 /c					
	-20 +70 °C.			0 +70 °C.		
	-20 +70 °C.					
()	450x400	600x400		650x400	800x600	
	- 5 . 15 -			NIKOMAX		

	1310	1383*	1550	1625
	0,33	0,32	0,19	0,22

*

	16	25	25	25
	1	100	100	100
	1550	1310	1550	1625
	0,05	0,05	0,05	0,05

				3	
NMF-4IS-002S2L-YL	2	SM 9/125	(A)-LSLTx	0,08	34
NMF-4IS-004S2L-YL	4	SM 9/125	(A)-LSLTx	0,14	46
NMF-4IS-008S2L-YL	8	SM 9/125	(A)-LSLTx	0,14	56
NMF-4IS-012S2L-YL	12	SM 9/125	(A)-LSLTx	0,17	64
NMF-4IS-016S2L-YL	16	SM 9/125	(A)-LSLTx	0,34	125
NMF-4IS-024S2L-YL	24	SM 9/125	(A)-LSLTx	0,34	150