

# NMF-2PH-**xxx**A1C-BK

NIKOMAX  
G. 652. D & G. 657. A1,


(A)-HF -40C,  
, 1

9/125


« »

FTTx

NMF-2PH-**xxx**A1 -BK  
ITU-T G. 652. D & G. 657. A1.

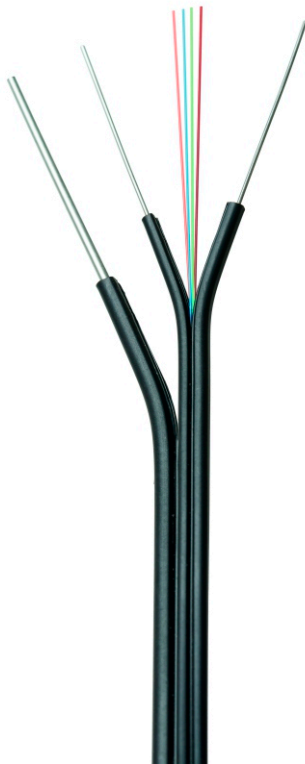

SM 9/125

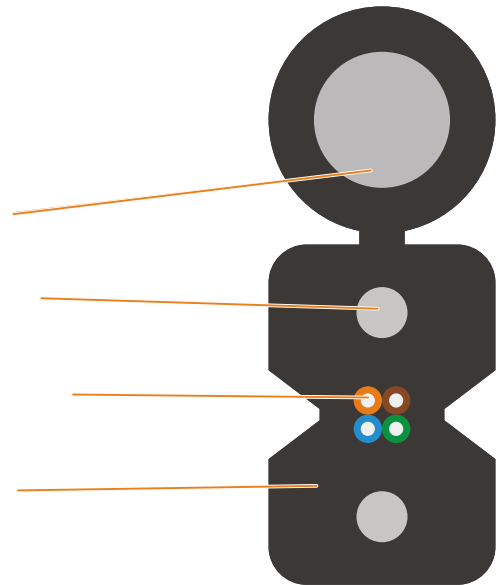

NIKOMAX NMF-2PH-004A1C-BK 4 x SINGLE MODE 9/125 ITU-T G. 652. D & G. 657. A1 Hr(A)-HF -40C DG23T 986M

NMF-2PH-xxxA1C-BK	
1	2
Single Mode 9/125	
ITU-T G. 652.D & G. 657.A1	
250 ± 10	
0,5	
1,2	
( )-HF	
2 ± 0,1 5,1 ± 0,1	
21,5	
30	
60	
600	
220 /	
-40 +60 °C. 0 +60 °C. -40 +60 °C.	
( ),	
310 310 250	
1	

	1	2	3	4
NMF-2PH-001A1C-BK				
NMF-2PH-002A1C-BK				
NMF-2PH-004A1C-BK				

NMF-2PH-001A1C-BK	1	SM 9/125	(A)-HF	310	310 250	23
NMF-2PH-002A1C-BK	2	SM 9/125	(A)-HF	310	310 250	23
NMF-2PH-004A1C-BK	4	SM 9/125	(A)-HF	310	310 250	23