

NKL 4240C-BK

F/UTP 4

, 0,55

, 305

.6,

6

10 /c.

NKL 4240C-BK


6.

(LSZH),

✓ ISO/IEC 11801,
EN 50173 TIA/EIA-568

✓

✓

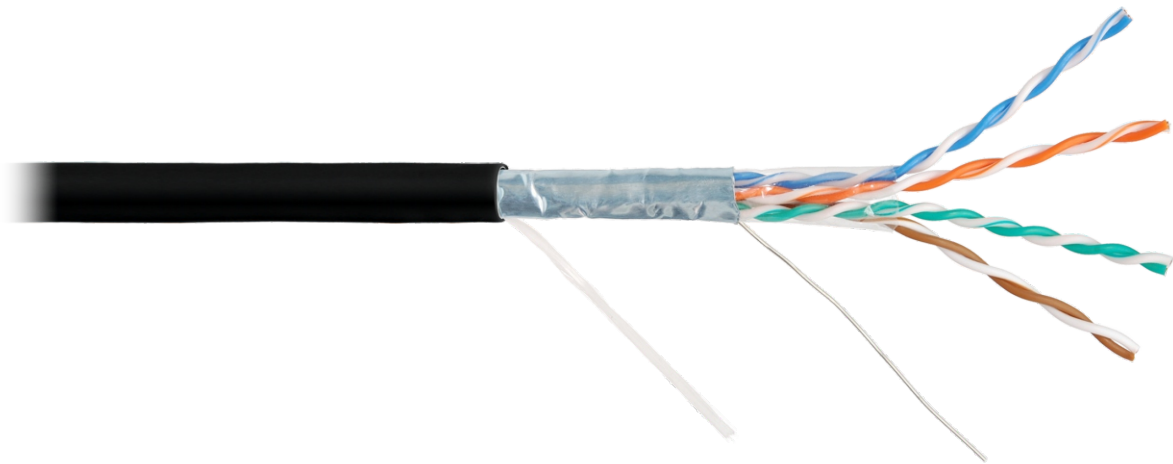

	NKL 4240C-BK
	6
	250
	F/UTP
	4
	23 AWG (0,55 ± 0,01)
	(HDPE)
	0,25 ± 0,02
	1,08 ± 0,05
	UV-LSZH
	(A)-HFLTx
	/
	0,56 ± 0,05
	7,4 ± 0,3
()	100% (26 AWG)
	51,4 ± 0,5 /
	8-
	4-
	80
	400
	100 ± 15
(NVP)	0,69 ± 0,1
	95 /
	305
	ISO/IEC 11801, EN 50173 TIA/EIA-568
	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
	-40 +70 °C. -10 +70 °C. -40 +70 °C
(,)	560 210
	-5 . 15 - NIKOMAX

NKL 4240C-BK	6	F/UTP	/	305	-	3	-
--------------	---	-------	---	-----	---	---	---